

**OFFICE OF THE PANCHAYAT SAMITI, KOSAGUMUDA**

**Dist:Nabarangpur**

**TENDER CALL NOTICE NO. 01 / 2018-19**

Letter No- 3067

Dated - 26 /05/2018

The Block Development officer, Kosagumuda invites sealed tenders in conformity with detailed tender call notice to be drawn up in state P.W.D F-2 contract from the eligible registered contractors of State P.W.D / Irrigation / R.W. / R.W.S.S. and P.H.E.D having valid license from competent authority for civil works. The proof of registration from appropriate authority shall be enclosed along with the Bid. If successful, the bidder who has not registered under State Government, Odisha has to register under the state PWD in appropriate class of eligibility before signing of the agreement.

The bidders may submit bids for the following works:-

Sl. No	Name of the work	Amount put to tender excluding GST(Rs)	EMD to be deposited 1% (Rs)	Cost of tender documents ( Non refundable ) (Rs)	Class of contractor	Time of completion
1	2	3	4	5	6	7
1	Construction of BDO quarter at Block colony Premises.	11,32,458.00	14000.00	6000.00	C & D	06 (Six Calender months)
2	Construction of AEE quarter at Block colony Premises.	11,32,458.00	14000.00	6000.00	C & D	06 (Six Calender months)
3	Construction of Staff quarter I at Block colony Premises.	7,47,705.00	9000.00	4000.00	C & D	06 (Six Calender months)
4	Construction of Staff quarter II at Block colony Premises.	7,47,705.00	9000.00	4000.00	C & D	06 (Six Calender months)
5	Construction of Staff quarter III at Block colony Premises.	7,47,705.00	9000.00	4000.00	C & D	06 (Six Calender months)
6	Construction of Staff quarter IV at Block colony Premises.	7,47,705.00	9000.00	4000.00	C & D	06 (Six Calender months)
7	Construction of Two nos of Addi. Class room of M.J.High School at Modagam.	7,85,095.00	9000.00	4000.00	C & D	06 (Six Calender months)

### **Important Dates:-**

Date of Tender Paper available	: -Dt.29.05.2018 to Dt.04.06.2018 (Tender paper to be downloaded from official website <a href="http://www.nabarangpur.nic.in">www.nabarangpur.nic.in</a> )
Last Date of receipt Tender paper	: -Dt.04.06.2018 (During office hour)
Date of opening Tender paper	: -Dt.05.06.2018 (Time 11.00 AM) at Block Office, Kosagumuda.

### **Terms and Conditions:-**

**01. Availability of Tender Papers:** The bid documents can be downloaded from the official web site of the district ([www.nabarangpur.nic.in](http://www.nabarangpur.nic.in)). From Dt.29.05.2018 to Dt.04.06.2018. The Cost of tender document specified in column-05, shall be attached with the bid in sealed envelope in shape of Banker's cheque/Bank Draft only in favour of **Block Development Officer, Kosagumuda payable at ICICI, Kosagumuda.**

**02.** Tender must accompany with 1 % EMD as mentioned in column-04, in shape of NSC/KVP/STDR/TDR / Banker's cheque dully pledged in favour of **Block Development Officer, Kosagumuda payable at ICICI, Kosagumuda** alongwith attested copies of valid and up to date GSTIN / Pan / Tin Certificate/Contractor Licence with experience certificate (if any) of contractors from competent authority without which the Tender will be liable for rejection .Affidavit about the authentication of documents including bank guarantee must be attached with tender documents.

**03.**The contractors shall furnish a certificate along with the tender to the effect that he /she is not related to any officer in the rank of an Assistant Engineer & above in the state PR & DW dept.

**04.** Tenderers are requested to quote their **percentage** rate both in **words and figures**. The Tenderers are required to put their signature on every over writing or any correction made in the tendered rate. The tender filled in figure only but without mentioning in words shall be liable for rejection for which no tender paper cost shall be returned to the tenderers.

**05.** The Tender schedule alongwith bill of quantities dully filled in and all relevant papers in sealed cover will be received through **registered post / speed post**. Also the tenderer have to submit tender papers in the office of the undersigned to be dropped in the designated tender box .The last date of receipt of tender paper is Dt.04.06.2018 in the office hour upto 1.00PM .The tender paper will be opened in the **Office of the Panchayat Samiti, Kosagumuda** at **11.00 AM** on Dt.05.06.2018 by the undersigned in presence of the tenderers or their authorised representatives who may be present at the time of opening.

**06.** Telegraphic tender will not be accepted. The undersigned will not be held responsible for the postal delay if any for the delivery of the documents or non-receipt of the same in time. However no tender will be received by Fax or by E-mail.

**07.** Schedule caste and schedule tribe & physically handicapped tenderers will deposit EMD as 50% of the amount as mentioned in Column-04 and they will produce Caste Certificate, Physically handicapped certificate at the time of submitting tender paper.


**08.** In case of Engineering contractors seeking exemption of EMD of the work, are instructed to produce an affidavit regarding his / her list of works for which he / she has claimed such exemption and being avoided such works, during current financial year- 2018-19.

**09.** The conditional tender will not be accepted on any circumstance by the authority. **When the tenderers will quote the rate is less than the estimated cost put to tender shall have to furnish the exact amount of differential cost (i.e. estimated cost put to tender minus the quoted amount) as Additional Performance Security in shape of Demand Draft only in favour of Block Development Officer, Kosagumuda payable at ICICI, Kosagumuda.** By the successful tenderer before execution of

Agreement. *Deposit in any other shape except Demand Draft will not be entertained.* Shortfall of any required documents, drafts an EMD, tender paper is liable for rejection.

10. Where the quoted value offered in a bid, works out to an amount which is 15% less than the tendered value then the bid document shall be rejected.


11. **No Excess tender is invited to the amount put to tender.** The authority reserves the right to reject any or all the tenderers without assigning any reason thereof.

  
Block Development Officer  
Kosagumuda

Dated: - 26 /05/2018

**Memo No. 3068**

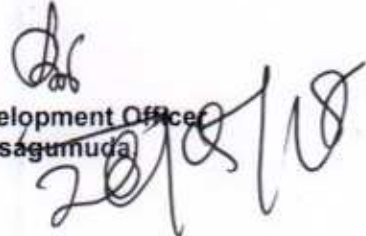
Copy submitted to the Collector, Nabarangpur / Project Director, DRDA, Nabarangpur for kind information & necessary action

  
Block Development Officer  
Kosagumuda

Dated:- 26 /05/2018

**Memo No.:-3069**

Copy submitted to D.I.P.R.O., Nabarangpur for information.

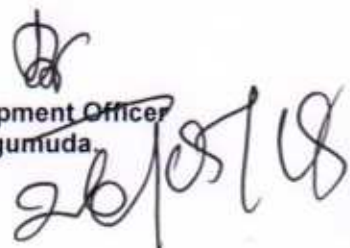
  
Block Development Officer  
Kosagumuda

Dated:- 26/05/2018

**Memo No:- 3070**

Copy to The Editor of **The Samaj, The Sambad and The Dharitri** for publication and necessary action.


Copy to the notice board of this office for wide publication.

  
Block Development Officer  
Kosagumuda

**Memo No:-3071**

**Dated: - 26 /05/2018**


Copy forwarded to the Addl. PD (Tech.), DRDA, Nabarangpur for kind information. He is requested to attend the office of the undersigned on **Dt.05.06.2018 at 11.00 AM** to participate in the tender opening for verification & scrutiny.

  
**Block Development Officer  
Kosagumuda.**

**Dated: - 26 /05/2018**

**Memo No. 3072**

Copy to District Informatics Officer, NIC, Nabarangpur for information and wide publication in the web site from Dt. **29.05.2018 to Dt. 04.06.2018**, after that he is requested to delete the same from the website. He shall confirm through a written reply.

  
**Block Development Officer  
Kosagumuda.**

**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF B.D.O.'S QUARTER IN THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Estimated Cost : Rs 14,00,000/-  
 Amount put to tender : Rs 1,132,458.00  
 E.M.D. required :01% of Bid Amount.  
 Cost of tender paper : Rs.6,000/-  
 Class of Contractor : 'D' & 'C' Class.

Last Date of Available of Tender-  
 Last Date of Receipt of Tender-paper  
 :Dt.04.06.2018(Upto 1.00PM)  
 Date of Opening of Tender-paper :  
 Dt.05.06.2018 (At 11.00am)  
 Time for completion :06 (Six) calender months.

Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc.complete as per the direction of the Engineer-in-charge.	38.064	100 Cum.	12795.78	4871.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	41.944	One Cum.	325.16	13638.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting,laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curring, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	32.351	One Cum.	3794.4	122753.00
04	Fly ash brick masonry in C.M. (1:6) in super structure with all cost,convayance & royalty of materials, all labour,etc complete as per the direction of the Engineer-in-charge.	39.169	One Cum.	3720.07	145712.00

05	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer, with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	38.859	One Cum.	4691.42	182304.00
06	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	38.859	One Qnti.	4785.45	185958.00
07	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in- Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.095	One Sqm.	100.212	1312.00
	(B) For RCC grade beams	45.415	One Sqm.	100.212	4551.00
	(C) For RCC lintel	26.88	One Sqm.	252.015	6774.00
	(D) For RCC Chajjas	21.289	One Sqm.	372.135	7922.00
	(E) For RCC columns	21.11	One Sqm.	564.731	11921.00
	(F) For RCC Beams	40.62	One Sqm.	564.731	22939.00
	(G) For RCC Roof slab	116.95	One Sqm.	372.135	43521.00
08	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	116.946	One Sqm.	165.913	19403.00
09	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	20.948	One Sqm.	153.51	3216.00
10	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	339.015	One Sqm.	142.642	48358.00
11	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	124.223	One Sqm.	95.9904	11924.00
12	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	982.125	One K.G.	70	68749.00
13	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	417.96	One K.G.	65	27167.00
14	Supplying, fitting and fixing PVC doors with frame of approved design.	2	One No.	4000	8000.00

*Dr*

15	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	102.402	One Sqm.	955.258	97820.00
16	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	24.828	One Sqm.	891.924	22145.00
17	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete..	7.405	One Sqm.	908.284	6726.00
18	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	407.641	One Sqm.	41.8403	17056.00
19	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	145.171	One Sqm.	99.6799	14471.00
20	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete	407.641	One Sqm.	65.0339	28510.00
21	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc complete.	45.462	One Sqm.	97.5963	4437.00
22	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1	One No.	2300.00	2300.00
					1132458.00
					Say 1132458.00
(Rupees Eleven Lakhs Thirty two Thousands Four Hundred Fifty Eight only)					
APPROVED FOR 22(TWENTY TWO )ITEMS					

BLOCK DEVELOPMENT OFFICER  
KOSAGUMUDA BLOCK.

My / our quoted rate is..... % less than / equal to and write in figure

.....% the above Tender cost.

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any
- (2) Strike out which are not applicable.

Signature of Contractor

**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF Staff QUARTER I THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Amount put to tender : Rs 747,705.00

Last Date of Available of Tender-paper: Dt.04.06.2018(Upto 1.00PM)

E.M.D. required :01% of Bid Amount.

Last Date of Receipt of Tender-paper :Dt.04.06.2018(Upto 1.00PM)


Cost of tender paper : Rs.4,000/-

Date of Opening of Tender-paper : Dt.05.06.2018 (At 11.00am)

Class of Contractor : 'D' & 'C' Class.

Time for completion :06 (Six) calendar months.

Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6.00
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc complete as per the direction of the Engineer-in-charge.	28.277	100 Cum.	12795.78	3618.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	21.963	One Cum.	325.16	7141.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting, laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curring, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	21.248	One Cum.	3794.40	80623.00
04	Fly-ash brick masonry in C.M. (1:6) in super structure with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	25.620	One Cum.	3720.07	95308.00
05	Fly-ash brick masonry in C.M. (1:6) in foundation and plinth with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	0.324	One Cum.	3686.74	1195.00
06	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer , with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	26.928	One Cum.	4691.42	126331.00






07	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	26.928	One Qnti.	4785.45	128863.00
08	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in-Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.296	One Sqm.	100.21	1332.00
	(B) For RCC grade beams	19.455	One Sqm.	100.21	1950.00
	(C) For RCC lintel	23.856	One Sqm.	252.02	6012.00
	(D) For RCC Chajjas	15.468	One Sqm.	372.13	5756.00
	(E) For RCC columns	18.090	One Sqm.	564.73	10216.00
	(F) For RCC Beams	30.020	One Sqm.	564.73	16953.00
	(G) For RCC Roof slab	67.440	One Sqm.	372.13	25097.00
9	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	67.441	One Sqm.	165.91	11189.00
10	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	22.770	One Sqm.	153.51	3495.00
11	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete	196.100	One Sqm.	142.64	27972.00
12	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	86.272	One Sqm.	95.99	8281.00
13	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	674.325	One K.G.	70.00	47203.00
14	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	200.880	One K.G.	65.00	13057.00
15	Supplying, fitting and fixing PVC doors with frame of approved design.	1.000	One No.	4000.00	4000.00
16	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	58.831	One Sqm.	955.26	56199.00
17	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	9.990	One Sqm.	891.92	8910.00
18	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete..	3.150	One Sqm.	908.28	2861.00
19	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	239.070	One Sqm.	41.84	10003.00

20	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	109.042	One Sqm.	99.68	10869.00
21	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete	239.070	One Sqm.	65.03	15548.00
22	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc. complete.	43.291	One Sqm.	97.60	4225.04
23	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1.000	One No.	2000.00	2300.00
				Total	736507.04
				Say	747705.00
(Rupees Seven Lakhs Fourty seven thousand seven hundred five only)					

APPROVED FOR 23(TWENTY THREE )ITEMS  
ONLY

  
BLOCK DEVELOPMENT OFFICER  
KOSAGUMUDA BLOCK

My / our quoted rate is..... % less than / equal to and write in figure  
.....% the above Tender cost.

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any thing else regarding tender rate is mentioned, the tender is liable for rejection.
- (2) Strike out which are not applicable.

Signature of Contractor

**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF A.E.E.'S QUARTER IN THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Estimated Cost : Rs 14,00,000/-

Amount put to tender : Rs 1,132,458.00

E.M.D. required :01% of Bid Amount.

Cost of tender paper : Rs.6,000/-

Class of Contractor : 'D' & 'C' Class.

Last Date of Available of Tender-

Last Date of Receipt of Tender-paper


:Dt.04.06.2018(Upto 1.00PM)

Date of Opening of Tender-paper :

Dt.05.06.2018 (At 11.00am)

Time for completion :06 (Six) calender months.

Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc.complete as per the direction of the Engineer-in-charge.	38.064	100 Cum.	12795.78	4871.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	41.944	One Cum.	325.16	13638.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting,laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curring, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	32.351	One Cum.	3794.4	122753.00
04	Fly ash brick masonry in C.M. (1:6) in super structure with all cost,convayance & royalty of materials, all labour,etc complete as per the direction of the Engineer-in-charge.	39.169	One Cum.	3720.07	145712.00



05	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer, with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	38.859	One Cum.	4691.42	182304.00
06	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	38.859	One Qnti.	4785.45	185958.00
07	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in- Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.095	One Sqm.	100.212	1312.00
	(B) For RCC grade beams	45.415	One Sqm.	100.212	4551.00
	(C) For RCC lintel	26.88	One Sqm.	252.015	6774.00
	(D) For RCC Chajjas	21.289	One Sqm.	372.135	7922.00
	(E) For RCC columns	21.11	One Sqm.	564.731	11921.00
	(F) For RCC Beams	40.62	One Sqm.	564.731	22939.00
	(G) For RCC Roof slab	116.95	One Sqm.	372.135	43521.00
08	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	116.946	One Sqm.	165.913	19403.00
09	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	20.948	One Sqm.	153.51	3216.00
10	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	339.015	One Sqm.	142.642	48358.00
11	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	124.223	One Sqm.	95.9904	11924.00
12	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	982.125	One K.G.	70	68749.00
13	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	417.96	One K.G.	65	27167.00
14	Supplying, fitting and fixing PVC doors with frame of approved design.	2	One No.	4000	8000.00

15	Supplying, fitting and fixing vitrified tiles in floor of size 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	102.402	One Sqm.	955.258	97820.00
16	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	24.828	One Sqm.	891.924	22145.00
17	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete..	7.405	One Sqm.	908.284	6726.00
18	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	407.641	One Sqm.	41.8403	17056.00
19	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	145.171	One Sqm.	99.6799	14471.00
20	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete	407.641	One Sqm.	65.0339	26510.00
21	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc complete.	45.462	One Sqm.	97.5963	4437.00
22	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1	One No.	2300.00	2300.00

1132458.00

				Say	1132458.00
(Rupees Eleven Lakhs Thirty two Thousands Four Hundred Fifty Eight only)					

APPROVED FOR 22(TWENTY TWO) ITEMS

BLOCK DEVELOPMENT OFFICER  
KOSAGUMUDA BLOCK.

My / our quoted rate is..... % less than / equal to and write in figure

.....% the above Tender cost.

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any
- (2) Strike out which are not applicable.

Signature of Contractor

**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF Staff QUARTER I THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Amount put to tender : Rs 747,705.00

Last Date of Available of Tender-paper: Dt.04.06.2018(Upto 1.00PM)

E.M.D. required :01% of Bid Amount.

Last Date of Receipt of Tender-paper :Dt.04.06.2018(Upto 1.00PM)

Cost of tender paper : Rs.4,000/-

Date of Opening of Tender-paper : Dt.05.06.2018 (At 11.00am)

Class of Contractor : 'D' & 'C' Class.

Time for completion :06 (Six) calendar months.


Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6.00
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc.complete as per the direction of the Engineer-in-charge.	28.277	100 Cum.	12795.78	3618.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	21.963	One Cum.	325.16	7141.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting, laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curing, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	21.248	One Cum.	3794.40	80623.00
04	Fly-ash brick masonry in C.M. (1:6) in super structure with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	25.620	One Cum.	3720.07	95308.00
05	Fly-ash brick masonry in C.M. (1:6) in foundation and plinth with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	0.324	One Cum.	3686.74	1195.00
06	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer , with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	26.928	One Cum.	4691.42	126331.00



07	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	26.928	One Qnti.	4785.45	128863.00
08	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in-Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.296	One Sqm.	100.21	1332.00
	(B) For RCC grade beams	19.455	One Sqm.	100.21	1950.00
	(C) For RCC lintel	23.856	One Sqm.	252.02	6012.00
	(D) For RCC Chajjas	15.468	One Sqm.	372.13	5756.00
	(E) For RCC columns	18.090	One Sqm.	564.73	10216.00
	(F) For RCC Beams	30.020	One Sqm.	564.73	16953.00
	(G) For RCC Roof slab	67.440	One Sqm.	372.13	25097.00
9	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	67.441	One Sqm.	165.91	11189.00
10	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	22.770	One Sqm.	153.51	3495.00
11	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete	196.100	One Sqm.	142.64	27972.00
12	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	86.272	One Sqm.	95.99	8281.00
13	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	674.325	One K.G.	70.00	47203.00
14	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	200.880	One K.G.	65.00	13057.00
15	Supplying, fitting and fixing PVC doors. with frame of approved design.	1.000	One No.	4000.00	4000.00
16	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	58.831	One Sqm.	955.26	56199.00
17	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	9.990	One Sqm.	891.92	8910.00
18	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete..	3.150	One Sqm.	908.28	2861.00
19	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	239.070	One Sqm.	41.84	10003.00

20	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	109.042	One Sqm.	99.68	10869.00
21	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete	239.070	One Sqm.	65.03	15548.00
22	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc. complete.	43.291	One Sqm.	97.60	4225.04
23	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1.000	One No.	2000.00	2300.00
				Total	736507.04
				Say	747705.00
(Rupees Seven Lakhs Fourty seven thousand seven hundred five only)					

APPROVED FOR 23(TWENTY THREE )ITEMS  
ONLY

  
BLOCK DEVELOPMENT OFFICER  
KOSAGUMUDA BLOCK

My / our quoted rate is..... % less than / equal to and write in figure  
.....% the above Tender cost.

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any thing else regarding tender rate is mentioned, the tender is liable for rejection.
- (2) Strike out which are not applicable.

Signature of Contractor



**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF Staff QUARTER II THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Amount put to tender : Rs 747,705.00

Last Date of Available of Tender-paper: Dt.04.06.2018(Upto 1.00PM)

E.M.D. required : 01% of Bid Amount.

Last Date of Receipt of Tender-paper : Dt.04.06.2018(Upto 1.00PM)

Cost of tender paper : Rs.4,000/-

Date of Opening of Tender-paper : Dt.05.06.2018 (At 11.00am)

Class of Contractor : 'D' & 'C' Class.

Time for completion : 06 (Six) calendar months.


Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6.00
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P, royalty, taxes etc. complete as per the direction of the Engineer-in-charge.	28.277	100 Cum.	12795.78	3618.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	21.963	One Cum.	325.16	7141.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting, laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curing, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	21.248	One Cum.	3794.40	80623.00
04	Fly-ash brick masonry in C.M. (1:6) in super structure with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	25.620	One Cum.	3720.07	95308.00
05	Fly-ash brick masonry in C.M. (1:6) in foundation and plinth with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	0.324	One Cum.	3686.74	1195.00
06	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer, with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	26.928	One Cum.	4691.42	126331.00



07	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	26.928	One Qnti.	4785.45	128863.00
08	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer-in-Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.296	One Sqm.	100.21	1332.00
	(B) For RCC grade beams	19.455	One Sqm.	100.21	1950.00
	(C) For RCC lintel	23.856	One Sqm.	252.02	6012.00
	(D) For RCC Chajjas	15.468	One Sqm.	372.13	5756.00
	(E) For RCC columns	18.090	One Sqm.	564.73	10216.00
	(F) For RCC Beams	30.020	One Sqm.	564.73	16953.00
	(G) For RCC Roof slab	67.440	One Sqm.	372.13	25097.00
9	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	67.441	One Sqm.	165.91	11189.00
10	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	22.770	One Sqm.	153.51	3495.00
11	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	196.100	One Sqm.	142.64	27972.00
12	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	86.272	One Sqm.	95.99	8281.00
13	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	674.325	One K.G.	70.00	47203.00
14	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	200.880	One K.G.	65.00	13057.00
15	Supplying, fitting and fixing PVC doors with frame of approved design.	1.000	One No.	4000.00	4000.00
16	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	58.831	One Sqm.	955.26	56199.00
17	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	9.990	One Sqm.	891.92	8910.00
18	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete..	3.150	One Sqm.	908.28	2861.00
19	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	239.070	One Sqm.	41.84	10003.00

20	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	109.042	One Sqm.	99.68	10869.00
21	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete.	239.070	One Sqm.	65.03	15548.00
22	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc. complete.	43.291	One Sqm.	97.60	4225.04
23	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1.000	One No.	2000.00	2300.00
				Total	736507.04
				Say	747705.00
(Rupees Seven Lakhs Fourty seven thousand seven hundred five only)					

APPROVED FOR 23(TWENTY THREE )ITEMS  
ONLY

  
BLOCK DEVELOPMENT OFFICER  
KOSAGUMUDA BLOCK

My / our quoted rate is..... % less than / equal to and write in figure  
.....% the above Tender cost. 20/5/18

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any thing else regarding tender rate is mentioned, the tender is liable for rejection.
- (2) Strike out which are not applicable.

Signature of Contractor

**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF Staff QUARTER III THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Amount put to tender : Rs 747,705.00

Last Date of Available of Tender-paper: Dt.04.06.2018(Upto 1.00PM)

E.M.D. required :01% of Bid Amount.

Last Date of Receipt of Tender-paper :Dt.04.06.2018(Upto 1.00PM)

Cost of tender paper : Rs.4,000/-

Date of Opening of Tender-paper : Dt.05.06.2018 (At 11.00am)

Class of Contractor : 'D' & 'C' Class.

Time for completion :06 (Six) calendar months.


Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6.00
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc.complete as per the direction of the Engineer-in-charge.	28.277	100 Cum.	12795.78	3618.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	21.963	One Cum.	325.16	7141.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting, laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curing, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	21.248	One Cum.	3794.40	80623.00
04	Fly-ash brick masonry in C.M. (1:6) in super structure with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	25.620	One Cum.	3720.07	95308.00
05	Fly-ash brick masonry in C.M. (1:6) in foundation and plinth with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	0.324	One Cum.	3686.74	1195.00
06	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer , with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	26.928	One Cum.	4691.42	126331.00

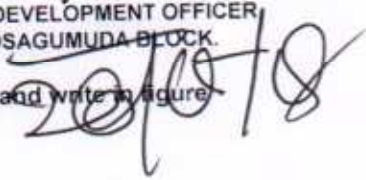
*(Handwritten Signature)*

07	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	26.928	One Qntl.	4785.45	128863.00
08	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in-Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.296	One Sqm.	100.21	1332.00
	(B) For RCC grade beams	19.455	One Sqm.	100.21	1950.00
	(C) For RCC intel	23.856	One Sqm.	252.02	6012.00
	(D) For RCC Chajjas	15.468	One Sqm.	372.13	5756.00
	(E) For RCC columns	18.090	One Sqm.	564.73	10216.00
	(F) For RCC Beams	30.020	One Sqm.	564.73	16953.00
	(G) For RCC Roof slab	67.440	One Sqm.	372.13	25097.00
9	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	67.441	One Sqm.	165.91	11189.00
10	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	22.770	One Sqm.	153.51	3495.00
11	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	196.100	One Sqm.	142.64	27972.00
12	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	86.272	One Sqm.	95.99	8281.00
13	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	674.325	One K.G.	70.00	47203.00
14	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	200.880	One K.G.	65.00	13057.00
15	Supplying, fitting and fixing PVC doors with frame of approved design.	1.000	One No.	4000.00	4000.00
16	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	58.831	One Sqm.	955.26	56199.00
17	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	9.990	One Sqm.	891.92	8910.00
18	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete..	3.150	One Sqm.	908.28	2861.00
19	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	239.070	One Sqm.	41.84	10003.00

20	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	109.042	One Sqm.	99.68	10869.00
21	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete.	239.070	One Sqm.	65.03	15548.00
22	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc. complete.	43.291	One Sqm.	97.60	4225.04
23	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1.000	One No.	2000.00	2300.00
				Total	736507.04
				Say	747705.00
(Rupees Seven Lakhs Fourty seven thousand seven hundred five only)					

APPROVED FOR 23(TWENTY THREE )ITEMS  
ONLY

  
BLOCK DEVELOPMENT OFFICER,  
KOSAGUMUDA BLOCK.

My / our quoted rate is..... % less than / equal to and write in figure  
.....% the above Tender cost. 

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any thing else regarding tender rate is mentioned, the tender is liable for rejection.
- (2) Strike out which are not applicable.

Signature of Contractor

**Tender Schedule**

**NAME OF THE WORK:-CONSTRUCTION OF Staff QUARTER IV THE PREMISES OF BLOCK COLONY, KOSAGUMUDA**

Amount put to tender : Rs 747,705.00

Last Date of Available of Tender-paper: Dt.04.06.2018(Upto 1.00PM)

E.M.D. required : 01% of Bid Amount.

Last Date of Receipt of Tender-paper : Dt.04.06.2018(Upto 1.00PM)

Cost of tender paper : Rs.4,000/-

Date of Opening of Tender-paper : Dt.05.06.2018 (At 11.00am)

Class of Contractor : 'D' & 'C' Class.

Time for completion : 06 (Six) calendar months.

Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6.00
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc complete as per the direction of the Engineer-in-charge.	28.277	100 Cum.	12795.78	3618.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	21.963	One Cum.	325.16	7141.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting, laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curring, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	21.248	One Cum.	3794.40	80623.00
04	Fly-ash brick masonry in C.M. (1:6) in super structure with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	25.620	One Cum.	3720.07	95308.00
05	Fly-ash brick masonry in C.M. (1:6) in foundation and plinth with all cost, conveyance & royalty of materials, all labour, etc complete as per the direction of the Engineer-in-charge.	0.324	One Cum.	3686.74	1195.00
06	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer , with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the work complete in all respects as directed by the Engineer in charge.	26.928	One Cum.	4691.42	126331.00


*(Signature)*

07	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	26.928	One Qnti.	4785.45	128863.00
08	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in-Charge of the work.				
	(A) For mass concrete in foundation and base of columns	13.296	One Sqm.	100.21	1332.00
	(B) For RCC grade beams	19.455	One Sqm.	100.21	1950.00
	(C) For RCC lintel	23.856	One Sqm.	252.02	6012.00
	(D) For RCC Chajjas	15.468	One Sqm.	372.13	5756.00
	(E) For RCC columns	18.090	One Sqm.	564.73	10216.00
	(F) For RCC Beams	30.020	One Sqm.	564.73	16953.00
	(G) For RCC Roof slab	67.440	One Sqm.	372.13	25097.00
9	20 mm thick cement plaster in cement mortar (1:4) as grading plaster over roof slab including cost, conveyance, royalty of all materials, all labour, etc. complete.	67.441	One Sqm.	165.91	11189.00
10	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	22.770	One Sqm.	153.51	3495.00
11	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	196.100	One Sqm.	142.64	27972.00
12	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	86.272	One Sqm.	95.99	8281.00
13	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	674.325	One K.G.	70.00	47203.00
14	Supplying, fitting and fixing of M.S. Grill doors & Grills with M.S. angle frame of approved design.	200.880	One K.G.	65.00	13057.00
15	Supplying, fitting and fixing PVC doors with frame of approved design.	1.000	One No.	4000.00	4000.00
16	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	58.831	One Sqm.	955.26	56199.00
17	Fixing tiles in dados skirting and risers with cement plaster in cement mortar (1:3) joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost, conveyance, royalty of all materials, all labour, etc complete..	9.990	One Sqm.	891.92	8910.00
18	Fixing tiles in floors or treads of steps and landing on 25 mm thick bed of cement mortar 1:1 joined with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing complete including including cost, conveyance, royalty of all materials, all labour, etc complete.	3.150	One Sqm.	908.28	2861.00
19	Priming one coat with any approved primer to walls & ceiling including all cost, conveyance of all materials and labours etc all complete	239.070	One Sqm.	41.84	10003.00



20	Painting two coats with weather seal paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T & P etc. complete.	109.042	One Sqm.	99.68	10869.00
21	Wall painting two coats with plastic emulsion paint of approved quality & shade on new work to give an even shade including cost, conveyance, taxes of all materials, labour, T & P etc. Complete	239.070	One Sqm.	65.03	15548.00
22	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc. complete.	43.291	One Sqm.	97.60	4225.04
23	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-charge of the work.	1.000	One No.	2000.00	2300.00
				Total	736507.04
				Say	747705.00
(Rupees Seven Lakhs Forty seven thousand seven hundred five only)					

APPROVED FOR 23(TWENTY THREE )ITEMS  
ONLY

  
BLOCK DEVELOPMENT OFFICER  
KOSAGUMUDA BLOCK.

My / our quoted rate is..... % less than / equal to and write in figure  
.....% the above Tender cost.

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any thing else regarding tender rate is mentioned, the tender is liable for rejection.
- (2) Strike out which are not applicable.

Signature of Contractor

Tender Schedule

NAME OF THE WORK:-CONSTRUCTION OF TWO NOS OF ADDITIONAL CLASS ROOM OF M.J. HIGH SCHOOL AT MODEGAM OF MODEGAM GP.

Amount put to tender : Rs 785,095.00

Last Date of Available of Tender-paper: Dt.04.06.2018(Upto 1.00PM)

E.M.D. required :01% of Bid Amount.

Last Date of Receipt of Tender-paper :Dt.04.06.2018(Upto 1.00PM)

Cost of tender paper : Rs.4,000/-

Date of Opening of Tender-paper : Dt.05.06.2018 (At 11.00am)

Class of Contractor : 'D' & 'C' Class.

Time for completion :06 (Six) calender months.

Sl. No.	Description of works	Qty.	Unit	RATE	
				Rate.	Amount
1	2	3	4	5	6.00
01	Earth work in excavation in foundation in hard with all leads and lifts including dressing and levelling the bed and depositing the excavated materials away from working area with all labour and T&P , royalty, taxes etc.complete as per the direction of the Engineer-in-charge.	40.460	100 Cum.	12669.10	5126.00
02	Providing and filling manually foundation & plinth with approved quality of sand in layers not exceeding 150mm. thick in each layer including all labours, watering, ramming, etc., required for the work including cost, conveyance, royalty and taxes for finished item of works as per the direction of the Engineer-in-charge.	35.950	One Cum.	320.35	11517.00
03	Cement Concrete (1:3:6) in foundation and plinth with 40 mm. size hand broken hard granite metal of approved quality from approved quarry including hoisting,laying and placing not exceeding 150mm. thick in each layer of concreting with proper packing & ramming by means of vibrator including curring, dewatering, shoring, shuttering if necessary at the time of laying concrete with cost, conveyance, royalty & taxes of all materials required for the work, T&P and finishing the exposed surface smooth as per specification & direction of the Engineer-in-charge., providing grooves & beads where necessary, etc. complete in all respects.	12.380	One Cum.	3483.40	43124.00
04	R.R.H.G Stone Masonary in C.M (1:6) in F & P. with all cost,convayance & royalty etc complete.	26.540	One Cum.	2480.62	65836.00
05	CB brick masonry in C.M. (1:6) in super structure with all cost,convayance & royalty of materials, all labour,etc complete as per the direction of the Engineer-in-charge.	25.310	One Cum.	3174.45	80345.00




06	R.C.C. work M-20 grade with 20 mm & down graded black h.g. stone chips including hoisting, lowering and laying concrete and compacting in layers not exceeding 15cm. thick in each layer with proper packing and ramming by means of vibrator/rammer, with cost, conveyance, royalty and other taxes of all materials and cost of all labour T&P and other machineries required for the	29.430	One Cum.	4223.64	124302.00
07	Straightening, cutting, bending, binding & welding if required and tying the grills and placing in proper position of MS/TS rods as per approved design and drawing for all RCC work including cost, conveyance, taxes of tested MS/TS rods and binding wire of 18 to 20 gauge, all labour and T&P complete for all RCC works as per the direction of Engineer in charge in conformity with approved design of the department etc. complete in all respect	26.490	One Qnti.	4270.63	113129.00
08	Rigid and smooth centering and shuttering for C.C./RCC works and dismantling them after casting including cost of all materials, labour and Tools & plants required for the work as per the specification and direction of the Engineer- in-Charge of the work.				
	(A) For RCC lintel	18.860	One Sqm.	228.24	4305.00
	(B) For RCC Beams	86.890	One Sqm.	538.34	46776.00
	(C) For RCC Roof slab	88.470	One Sqm.	348.32	30816.00
09	16 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	182.120	One Sqm.	135.67	24708.00
10	12 mm thick cement plaster in cement mortar (1:6) including cost conveyance royalty of all materials, all labour, etc. complete.	92.580	One Sqm.	91.72	8491.00
11	Supplying, fitting and fixing of M.S. doors & Window Shutters with M.S. Angle frame of approved design.	1389.600	One K.G.	97.33	135250.00
12	2.5 CM thick AS flooring in CC (1:2:4) using 12 mm size HG chips including neat cement punning.	21.140	One No.	221.77	4688.00
13	Supplying, fitting and fixing vitrified tiles in floor of size grooms 600mm X 600mm of approved make laid on 20mm thick cement mortar (1:4) and filling the joints with white cement including cost of all materials, labour, etc.	81.330	One Sqm.	726.15	59058.00
14	20 mm thick cement plaster in cement mortar (1:6) in over stone work including cost, conveyance, royalty of all materials, all labour, etc. complete.	23.48	One Sqm.	144.63	3396.00
15	Finishing wall surface with water proofing cement paint of approved shade two coats to give an even shade including cost of paint.	274.700	One Sqm.	25.48	6999.00
16	Painting two coats with Distemper paint of approved quality over a coat of primer including cost, conveyance, taxes of all materials, labour, T	182.120	One Sqm.	47.16	8589.00

Dr

17	Painting two coats with approved enamel paint on new iron work including cost conveyance, taxes of all materials and labour etc complete.	70.200	One Sqm.	94.59	6640.00
18	Construction of transparency board at the work site with all cost, conveyance, taxes and royalty of the materials required for the work including painting, and writing required data as per specification and direction of the Engineer-in-	1.000	One No.	2000.00	2000.00
				Total	785095.00
				Say	785095.00
(Rupees Seven Lakhs Eighty Five Thousands Ninty Five only)					

APPROVED FOR 23(TWENTY THREE )ITEMS

  
 BLOCK DEVELOPMENT OFFICER  
 KOSAGUMUDA BLOCK.

My / our quoted rate is..... % less than / equal to and write in figure  
 .....% the above Tender cost.

Note:

- (1) The contractor should not write any thing except quoting of percentage and in case any thing
- (2) Strike out which are not applicable.

Signature of Contractor